

# VBX+))) Marking a New Era in Spreader Technology



## Introducing the VBX+ | Where Innovation Meets Performance

Get ready to revolutionize your snow and ice management game with the VBX+, the dawn of spreader technology from BOSS. Designed for the modern contractor, the VBX+ is packed with smart features that put you in control like never before, allowing precise material distribution and seamless job site tracking—all without any subscription fees. Say goodbye to downtime with easy-to-maintain components and unrivaled power and performance. With sleek LED lighting, advanced safety features, optional auger or pintle chain, and intuitive design enhancements, the VBX+ will do Whatever It Takes to Keep 'Em Open when winter weather strikes. Elevate your operations, embrace the future, and experience the VBX+.

## Standard Smart Features



⊗ Job Tracking

⊗ Future-Ready

⊗ Standard Rate Control

⊗ Simplified Material Calibration Adjustment

⊗ Controller Operated LED Lighting

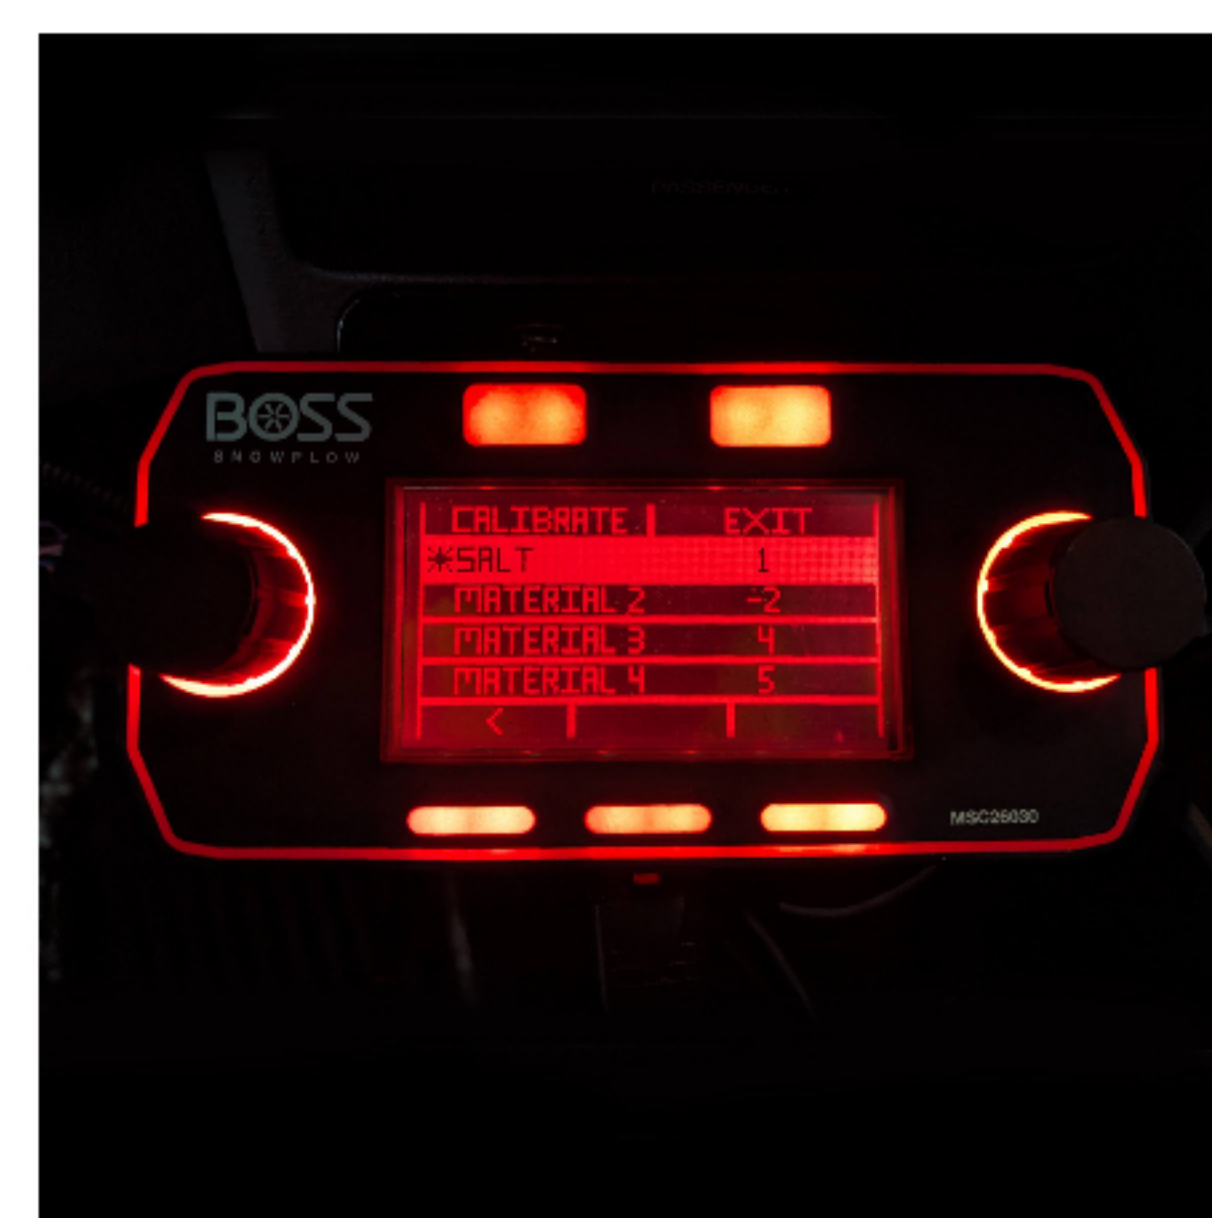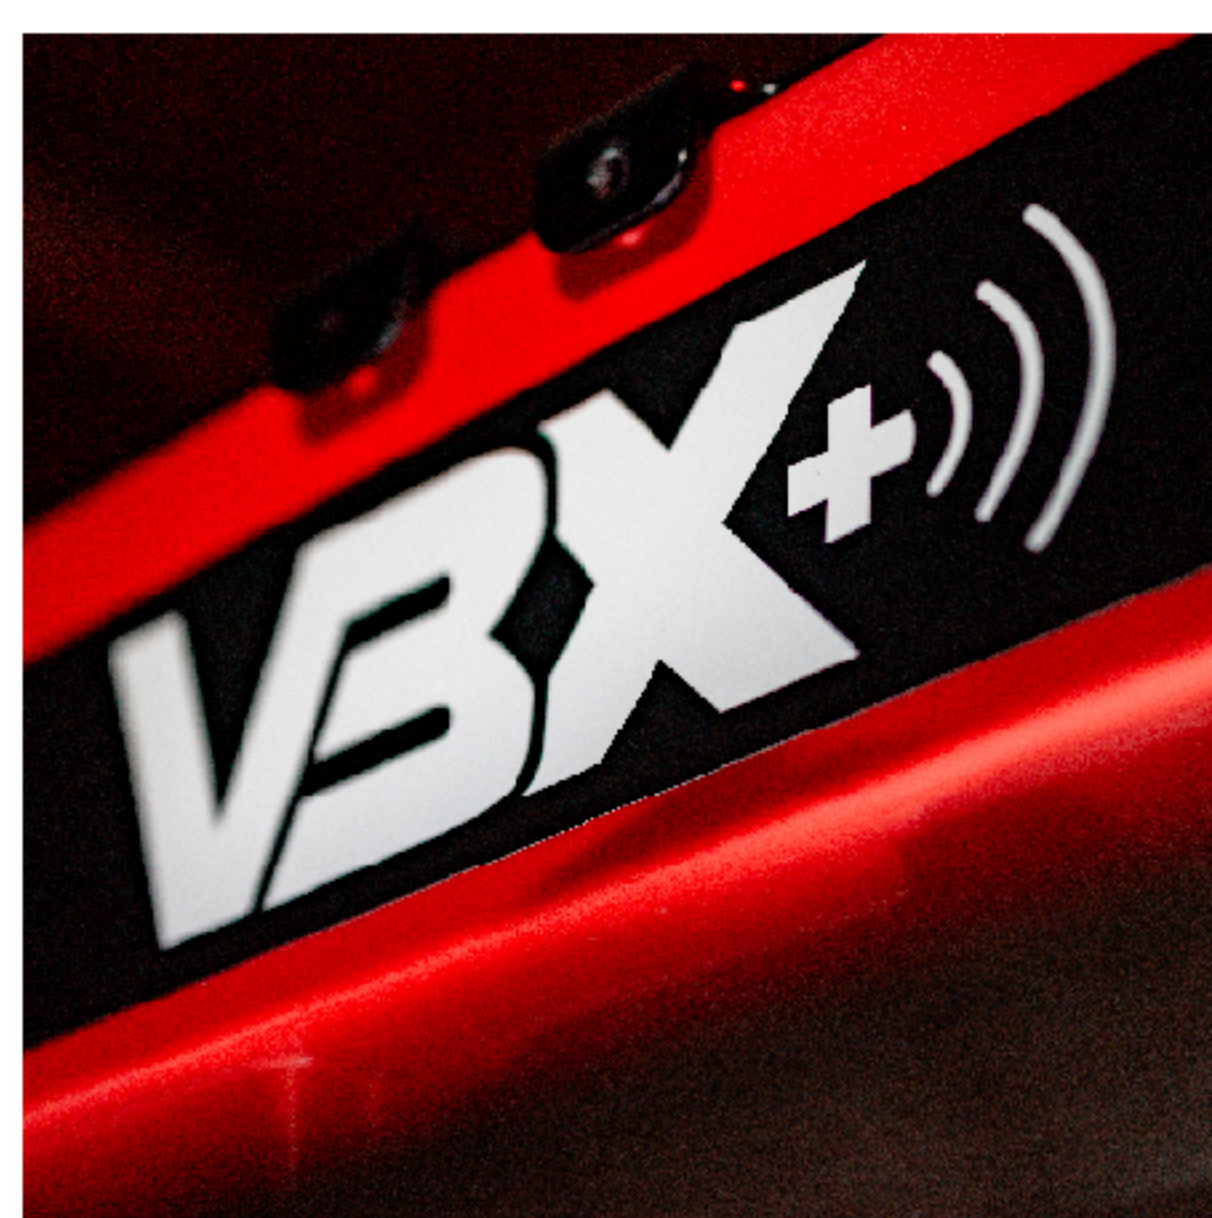

## Additional Standard Features

⊗ Easy Access Hatch

⊗ Upgraded Motor Performance

⊗ Remote Grease Zerks

⊗ Optional Auger or Pintle Chain System

⊗ Reinforced Poly Hopper

⊗ Urethane Spinner




⊗ Standard Tarp System

⊗ Advanced Auger System

⊗ For complete information please scan the QR Code





Specifications	VBX+ 1.5 YD Auger   Pintle	VBX+ 2 YD Auger   Pintle	VBX+ 3 YD Auger   Pintle
<b>Capacity</b>	Cubic yd 1.5/Cubic m 1.15	Cubic yd 2/Cubic m 1.53	Cubic yd 3/Cubic m 2.3
<b>Chute Construction</b>	Polyethylene with Stainless Steel Frame		
<b>Control</b>	Dual Variable Speed Control		
<b>Deflector</b>	Standard		
<b>Display Type</b>	LCD Display Controller		
<b>Feed Mechanism</b>	Auger - Auger   Pintle/Conveyor Chain - Pintle		
<b>Feed Motor</b>	3/4 HP Feed Motor		
<b>Gearbox</b>	Planetary Worm 91:1 - Auger   Planetary Worm 137:1 - Pintle		
<b>Grease Hoses</b>	Standard		
<b>Hopper Construction</b>	3/16" (0.5 cm) Double Wall Polyethylene Hopper		
<b>Hopper Cover</b>	VCP Tarp w/ integral tie-downs		
<b>Hopper Height</b>	38 in/96.52 cm	38 in/96.52 cm	48 in/121.92 cm
<b>Hopper Length</b>	78 in/198 cm	96 in/244 cm	107 in/272 cm
<b>Hopper Width</b>	48.25 in/122.56 cm   48 in/121.92 cm	48.25 in/122.56 cm   48.25 in/121.92 cm	48 in/121.92 cm
<b>Inverted V Baffle</b>	Standard - Auger   Optional - Pintle		
<b>LED CHSML</b>	Standard		
<b>LED Strobe Lights</b>	Standard (Two)		
<b>Material Conveying Method</b>	6" (15 cm) OD x 9" (23 cm) Pitch Full Length Auger - Auger   14" (36 cm) Wide Pintle Chain - Pintle		
<b>Max Feed Rate</b>	150 lbs (70 kg) per minute - Auger   240 lbs (110 kg) per minute - Pintle		
<b>Minimum Bed Length</b>	66 in (168 cm)	78 in (198 cm)	96 in (243.8 cm)
<b>Smart Compatible</b>			
<b>Spinner</b>	15 in (38.1 cm) Diameter Poly Spinner		
<b>Spinner Assembly</b>	Easily Removable/Swing Out and Height Adjustable		
<b>Spinner Gearmotor</b>	1/2 HP Spinner Gearmotor (Located above spinner)		
<b>Spreader Overall Length</b>	93.5 in/237 cm	115 in/292 cm	122 in/309 cm
<b>Spreader Switches</b>	Two Dual Function Rocker Switches, E-Stop		
<b>Spreading Width</b>	8 ft - 40 ft (2.4 m - 12 m) Dry free-flowing material		
<b>Tie-Down Kit</b>	Standard		
<b>Top Screen</b>	Standard		
<b>Trough</b>	11 ga. Stainless Steel		
<b>Vehicle Application</b>	3/4 T & 1 T	3/4 T & 1 T	15,000+ GVWR
<b>Vehicle to Spreader Connector</b>	Custom Sealed and Overmolded Power & Controls Connector		
<b>Vibrator</b>	Standard (Dual Vibrator) - Auger   Optional - Pintle		
<b>Weight</b>	640 lbs/290 kg   680 lbs/308 kg	690 lbs/313 kg   730 lbs/331 kg	810 lbs/367 kg   840 lbs/381 kg